
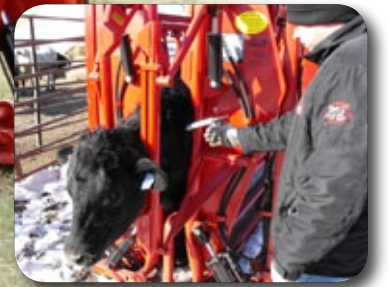


Cattle Care Hydraulic Chutes

With Patented Neck Extender Technology

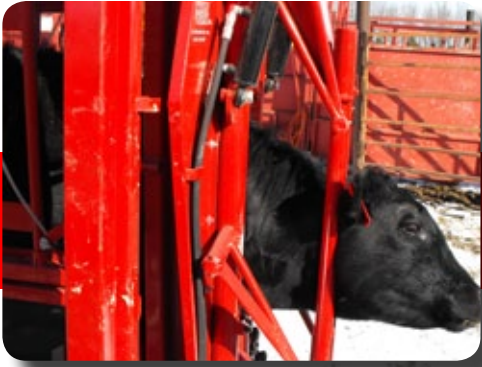

Offering the Most Injection Access in the Industry!

Titan West's patented neck extender is hydraulically activated to hold the cow securely in place, while providing more injection access than any other product in the industry.

Product Features:

- Designed with safety of animal & operator in mind
- Gently holds the head still while you work
- ¼" Rumber® footdoors reduce noise & last longer
- Easy-open side panels configurable to your needs
- Neck extender has own pressure controls
- Ball bearing pivot points at bottom of gates
- Rubber inserts at pivot & slam points at side windows
- Chutes tested and proven by feedlots for over 20 years
- All chutes can be made portable

Product Options:

- Palpation Doors, Hydraulic Adjustable Bottom & Scales available
- Optional Bull Package (12" longer) available
- Pivot Swing Arm Controls

ACKERMAN 
SINCE 1969

DISTRIBUTING.COM
800-726-9091

Built to Make it Easier for You & Your Cattle



White area is preferred site for all injections. Chute gives you the largest available injection area in the industry.

Maximum 15" of injection area or neck access—depending on size of animal.



Features a 3 HP single-phase motor with vane pump for quiet operation, the power unit is isolated with rubber mounts and is easily relocated. (8 HP gas engine is available)



Portable Attachment balanced for easy positioning, the 2" x 4" steel frame with hand operated winch allows for one-man transport.



Optional palpation door offers plenty of room while the neck extender keeps the animal to the chute's front.

**TITAN
WEST INC**
Livestock Handling Equipment



Lay-over feature offers up to 90° of rotation and offers a built-in, drop-down floor for increased convenience.



Convenient location of valve controls (Note: separate pressure controls for the neck extender).



Optional Swing Arm for control valves.

Specifications are subject to change without notice or obligation from the manufacturer. Some photos shown with optional equipment.

ACKERMAN 
SINCE 1969
DISTRIBUTING.COM
800-726-9091



Livestock Handling Equipment

An "under the hat family" Company

Cattle Care Chute -Specifications

Working Dimensions

Headgate (Horizontal)

- Opens parallel to 31-1/2" wide
- Inside Height 68" tall
- Neck Extender maximum inside 16" length

Squeeze-V Squeeze (with Hydraulic Side Adjust)

- Top opens from 16" to 37" wide
- Center (bottom of widows) opens from 12-1/2" to 29" wide
- Bottom opens from 9" to 22" wide
- Inside 96-1/2" long
- Inside 70-1/2" height
- Chest Rest Height 18-1/2"

Tailgate

- Opens parallel to 31-1/2" wide
- Inside Height 68" tall

Overall outside Dimensions

104" Long

74" Wide (with Headgate and Tailgate closed)

82" Tall (with Remote Power Supply)

92" Tall (with Power Supply mounted on Top)

96" Tall (with Swing Arm)

Optional Swing Arm has a 75" Radius from center of the Chute (measured 36" back from the front of the Headgate)

Optional EZ Lift raises the Chute up 16"

Miscellaneous Specifications

Chute Frame constructed primarily of 2-1/2" x 2-1/2" x 1/4" Square Tube
Chute Sides constructed primarily of 2" x 2" x 3/16" Square Tube
Interlocking Animat Floor 23" x 83-3/4" x 3/4" (Weight 46 pounds)
Prince Stack Valve for Controls
2-5/16" Coupler weight rating of 12,500 pounds on all Portable Attachments
6-Bolt Rim with ST225 75R15 Tires on all Portable Attachments

Cylinders

Neck Extender (1)2" x 4" and (1)2-1/4" x 4" Re-phasing
Headgate (Horizontal) (1)1-1/2" x 14" (1)1-3/4" x 14" Re-phasing
Center Squeeze (1)2" x 6"
Tailgate (Horizontal) (1)1-1/2" x 14" (1)1-3/4" x 14" Re-phasing
Optional-Hydraulic Lower Adjust (4)2" x 6" Steering Cylinder
Optional-EZ Lift Portable (2)2-1/2" x 16" and (2)2-3/4" x 16" Re-phasing

Weight (does not include the Power Supply)

3000 pounds with Horizontal Headgate and Tailgate, with Hydraulic Lower Adjust, without Swing Arm and without EZ Lift Portable.
3300 pounds with Horizontal Headgate and Tailgate, with Hydraulic Lower Adjust, with Swing Arm and without EZ Lift Portable.
4020 pounds with Horizontal Headgate and Tailgate, with Hydraulic Lower Adjust, without Swing Arm and with EZ Lift Portable.
4320 pounds with Horizontal Headgate and Tailgate, with Hydraulic Lower Adjust, with Swing Arm and with EZ Lift Portable.